


## Important advice for the usage of NATSEQ *Packer*

- If possible, always mount/dismount modules at or in the water
- Put behind the Solo Cockpit

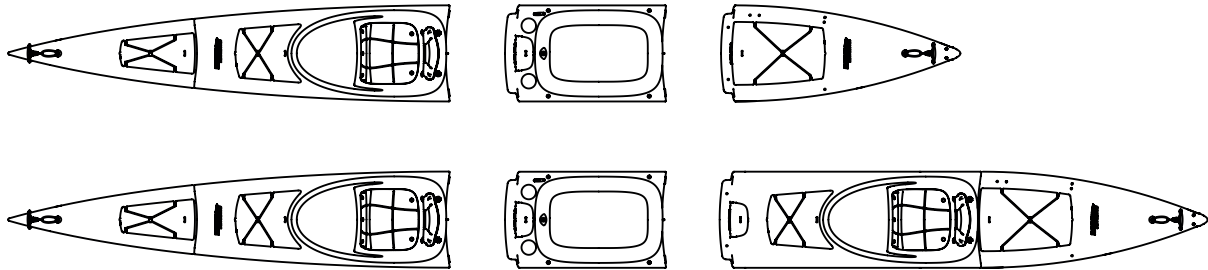

- Always use the rudder system if possible (extension lines included in the scope of delivery)
- Ensure sufficient payload so that the skag is completely in the water
- Avoid carrying over in assembled condition
- Usage of a kayak trolley:
  - Solo version: follow instructions in the kayak manual
  - Tandem version: use only in two-part condition

## Steering System for NATSEQ *Solo* and *Packer* - Additional assembly instructions

(A+C) Guide the control lines - as well the extensions - through the line connectors on the left and right and tighten using a loop

(B) Put the lines on both sides around the deck fittings

(D) Feed the end-ball through the loop of the extension of the pulley rope

